


**KAPPA 55** max. 57 l/min - 15 GPM • 40 bar - 580 PSI • 550 RPM







**KAPPA 65** max. 67 l/min - 18 GPM • 40 bar - 580 PSI • 550 RPM

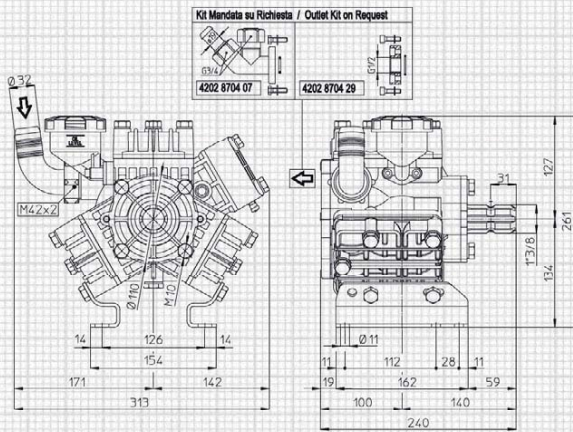

**alberi P. di F. disponibili available P.T.O. shaft**

 <p><b>1C</b></p>	 <p><b>VA</b></p> <p>4-5-6-14-15</p>	 <p><b>TS 1C</b></p> <p>1</p>	 <p><b>TS FVA</b></p> <p>1</p> <p>4-5-6-14-15</p>	<p>Per le dimensioni degli Alberi P. di F. vedi pag. 35</p> <p>For P.T.O. Shaft dimensions see page 35</p>
---	--	---	--	--

**applicazioni shaft adaptors**

 <p>1</p>	 <p>4</p>	 <p>6</p>	 <p>14</p> <p>Non fornito Not supplied</p>	 <p>RIDOTTORI 15 Vedi pag. 42/43</p> <p>GEAR REDUCTIONS 15 See page 42/43</p>
 <p>5</p>				

MOD.	RPM	0 bar / 0 PSI				10 bar / 145 PSI				20 bar / 290 PSI				30 bar / 435 PSI				40 bar / 580 PSI				Peso Weight Kg
		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		Portata Flow rate		Potenza Power		
		l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	l/min	GPM	HP	kW	
<b>KAPPA 55</b>	400	41.5	11.0	0.4	0.3	39.1	10.3	1.1	0.8	38.6	10.2	2.0	1.5	38.4	10.1	3.0	2.2	38.2	10.1	3.9	2.9	13
	450	46.5	12.3	0.5	0.3	43.7	11.5	1.2	0.9	43.2	11.4	2.3	1.7	43.0	11.4	3.4	2.5	42.8	11.3	4.4	3.2	
	500	51.5	13.6	0.5	0.4	48.6	12.8	1.4	1.0	47.9	12.7	2.5	1.9	47.7	12.6	3.7	2.7	47.5	12.5	4.9	3.6	
	550	57.0	15.0	0.6	0.4	53.6	14.2	1.5	1.1	53.0	14.0	2.8	2.1	52.8	13.9	4.1	3.0	52.6	13.9	5.4	4.0	
<b>KAPPA 65</b>	400	48.4	12.8	0.5	0.4	47.0	12.4	1.3	1.0	46.4	12.3	2.4	1.8	46.1	12.2	3.6	2.6	45.8	12.1	4.7	3.5	13
	450	54.4	14.4	0.5	0.4	53.0	14.0	1.5	1.1	52.4	13.8	2.8	2.0	52.1	13.8	4.1	3.0	51.8	13.7	5.3	3.9	
	500	60.3	15.9	0.6	0.4	58.8	15.5	1.7	1.2	58.3	15.4	3.1	2.3	58.0	15.3	4.5	3.3	57.7	15.2	5.9	4.3	
	550	67.0	18.0	0.7	0.5	64.8	17.1	1.9	1.4	64.2	17.0	3.4	2.5	63.9	16.9	5.0	3.7	63.6	16.8	6.5	4.8	